

## Dual Low Dropout Linear Voltage Regulators

### ● Features

- CMOS Low Power Consumption 4.0 $\mu$ A ( TYP.)
- Low Dropout Voltage : 250mV at  $I_{OUT} = 100mA$
- Output Current : more than 250mA
- Highly Accurate :  $\pm 2\%$
- Internal current limiting and short protecting
- High Ripple Rejection :70DB(1KHz)
- Operating Temperature Range: -40 to +85

### ● General Description

The RCR3402 series are highly accurate, dual, low noise, CMOS LDO voltage regulators, one channel output voltage is 1.5V , the other channel output voltage is 3.0V .Performance features of the series includes low output noise, high ripple rejection ratio, low dropout and very fast turn-on times.

The RCR3402 includes a reference voltage source, error amplifiers, The series provides large currents with a

significantly small dropout voltage. The RCR3402 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error correction circuit.


The current limiter's feedback circuit also operates as a short protect for the output current limiter.

SOT23-5L & SOT23-6L packages are available.

### ● Applications

- Battery powered equipment
- Reference voltage sources
- Cameras, Video cameras
- Portable AV systems
- Mobile phones
- MP3
- Communication tools
- Portable games


### ● Package Information

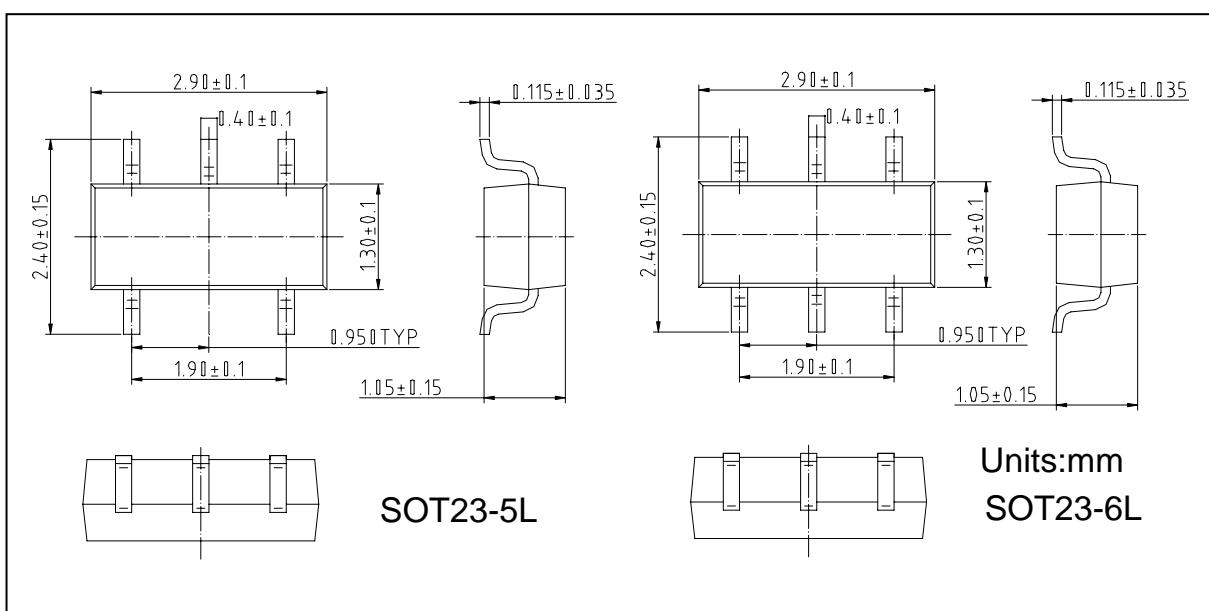

- Pin Configuration


Pin Configuration Code									
A		B		C		D		E	
Pin Name	SOT23-5L	Pin Name	SOT23-6L	Pin Name	SOT23-6L	Pin Name	SOT23-6L	Pin Name	SOT23-5L
	VIN2		VIN2		VIN2		VIN1		VOUT2
	GND		GND		VIN1		VIN2		GND
	VIN1		VIN1		GND		GND		VOUT1
	VOUT1		VOUT1		VOUT2		VOUT2		VIN1
	VOUT2		NC		NC		NC		VIN2
			VOUT2		VOUT1		VOUT1		

- Functional Block Diagram

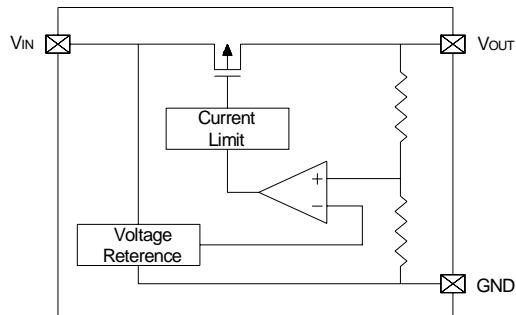

- Ordering information

**RCR3402 -**

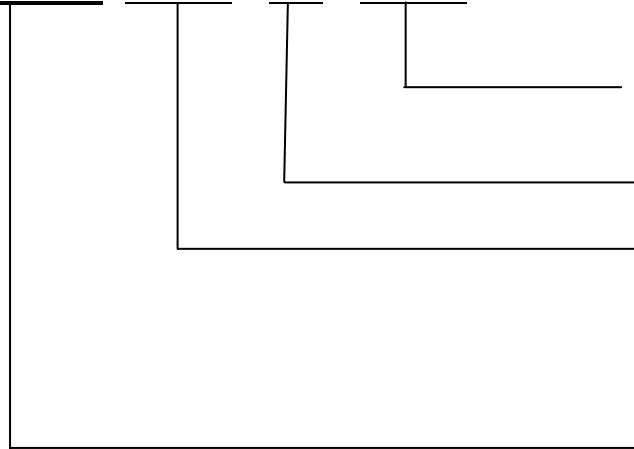

Package Type:

SK: SOT23-5L; SL: SOT23-6L;

Pin Assignment:

A; B; C; D; E Refer to the Pin Configuration

Output Voltage

13: Vout1=1.5V & Vout2=3.0V;

31: Vout1=3.0V & Vout2=1.5V;

.....

Refer to the Followed Output Voltage Select Table

Indicates the product number

**Output Voltage Select Table** ( Please connect the provider for details, the followed explanation just a part not all )



**RCR3402**

<b>Output Voltage Code:</b> 1 = 1.5V; 2 = 1.8V; 3 = 3.0V; 4 = 3.3V; 5 = 3.6V; ..... A = 4.0V ..... Z = 5.0V			
<b>Code</b>	<b>Explanation</b>	<b>Code</b>	<b>Explanation</b>
13	$V_{OUT1} = 1.5V \text{ & } V_{OUT2} = 3.0V$	5A	$V_{OUT1} = 3.6V \text{ & } V_{OUT2} = 4.0V$
31	$V_{OUT1} = 3.0V \text{ & } V_{OUT2} = 1.5V$	Z3	$V_{OUT1} = 5.0V \text{ & } V_{OUT2} = 3.0V$
21	$V_{OUT1} = 1.8V \text{ & } V_{OUT2} = 1.5V$	AZ	$V_{OUT1} = 4.0V \text{ & } V_{OUT2} = 5.0V$

### ● Absolute Maximum Ratings

<b>Parameter</b>	<b>Symbol</b>	<b>Ratings</b>		<b>Unit</b>
Input Voltage	$V_{IN}$	-0.3 to 9		V
Output Current	$I_{OUT}$	350		mA
Output Voltage	$V_{OUT}$	$V_{SS}-0.3 \text{ to } V_{IN}+0.3$		V
Operating Ambient Temperature	$T_{OPR}$	-40 to +125		
Storage Temperature	$T_{STG}$	-65 to +150		
Continuous Total Power Dissipation	$P_D$	SOT23-5L SOT23-6L	250 400	mW

### ● Electrical Characteristics

$V_{IN} = V_{OUT} + 1V, T_A = 25^\circ C, C_{IN} = 10\mu F, C_L = 10\mu F$ , unless otherwise specified.

<b>Parameter</b>	<b>Symbol</b>	<b>Test Conditions</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Output Voltage	$V_{OUT(E)}$	$I_{OUT} = 40mA$	0.98	$V_{OUT(T)}$	1.02	V
Maximum Output Current	$I_{OUT}$		250	--	--	mA
Load Regulation	$V_{OUT}$	1mA $I_{OUT}$ 100mA	--	25	--	mV
Dropout Voltage	$V_{DROP1}$	$I_{OUT} = 80mA$	--	150	--	mV
	$V_{DROP2}$	$I_{OUT} = 160mA$	--	320	--	mV
Supply Current	$I_{SS}$	$V_{IN} = 4.0V$	--	4.0	--	$\mu A$
Line Regulations	$V_{OUT}$	$I_{OUT} = 40mA$	--	0.01	0.3	%/V
	$V_{OUT}^* - V_{IN}$	$V_{OUT(T)} + 1.0V \text{ to } V_{IN} = 6V$	--			
Input Voltage	$V_{IN}$			--	9	V
Output Voltage	$V_{OUT}$	$I_{OUT} = 40mA$	--			
Temperature Characteristics	$T_{OPR}^* - V_{OUT}$	-40 to $T_{OPR}$ 85	--	$\pm 100$	--	ppm/

**Note 1.**  $V_{OUT(T)}$ =Specified Output Voltage .

**Note 2.**  $V_{OUT(E)}$ =Effective Output Voltage ( i.e. the output voltage when "  $V_{OUT(T)}+1.0V$ " is provided at the VIN pin while maintaining a certain  $I_{OUT}$  value).


**Note 3.**  $V_{DROP} = \{ V_{IN1} \text{ ( Note5 )} - V_{OUT1} \text{ ( Note4 )} \}$

**Note 4.**  $V_{OUT1} = A$  voltage equal to 98% of the Output Voltage whenever an amply stabilized  $I_{OUT} \{ V_{OUT(T)} + 1.0V \}$  is input.

**Note 5.**  $V_{IN1}$  = The Input Voltage when  $V_{OUT1}$  appears as Input Voltage is gradually decreased.


**Note 6.** Unless otherwise stated,  $V_{IN} = V_{OUT(T)} + 1.0V$

**Typical Application Circuit**

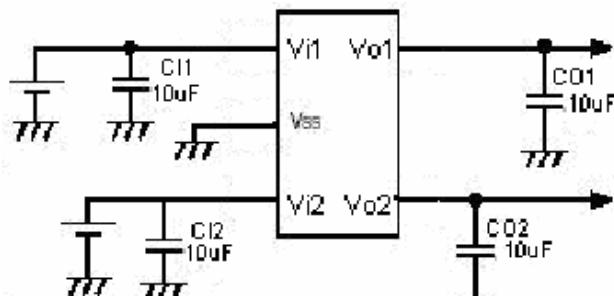


All capacitors are tantalum or ceramic


- Typical Performance Characteristics**

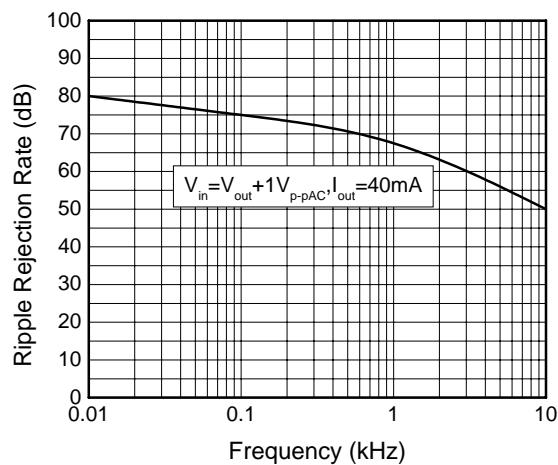


**Figure2. Ripple Rejection Rate**

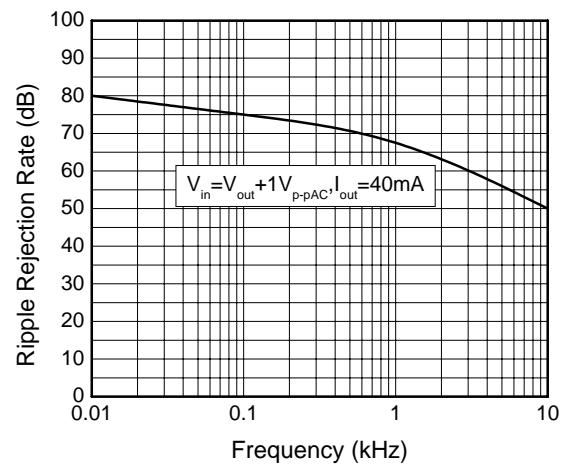

**Figure2. Ripple Rejection Rate**

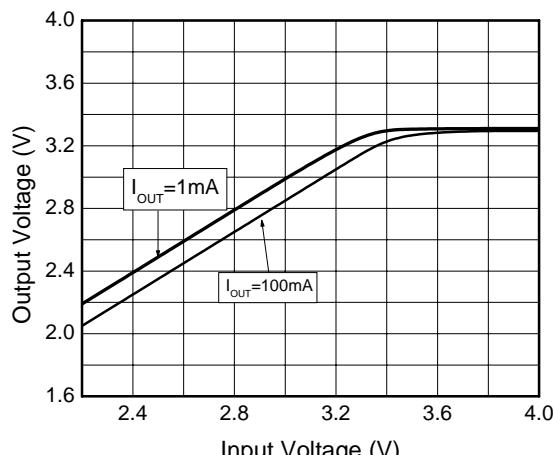

**Figure3. Output Voltage vs. Input Voltage**

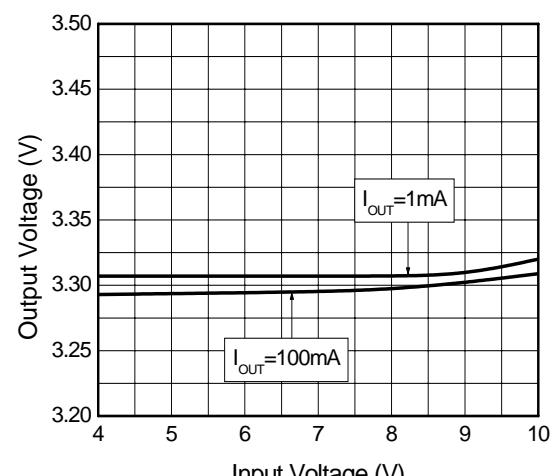

**Figure4. Output Voltage vs. Input Voltage**

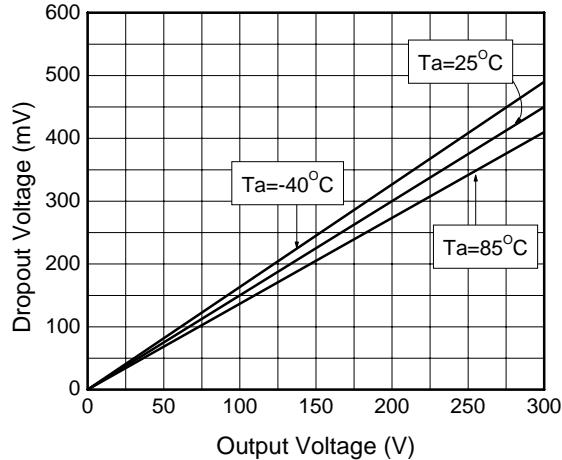


Figure 5. Dropout Voltage vs. Output Current

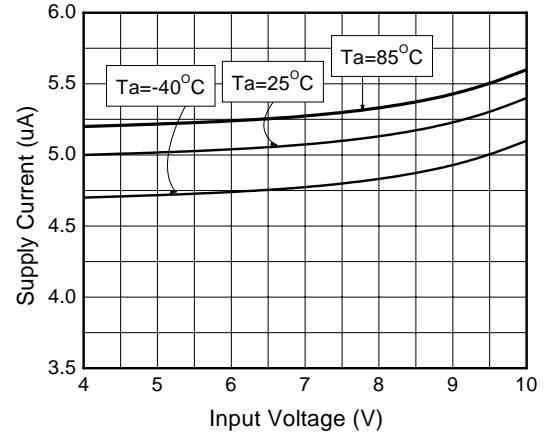


Figure 6. Supply Current vs. Input Voltage

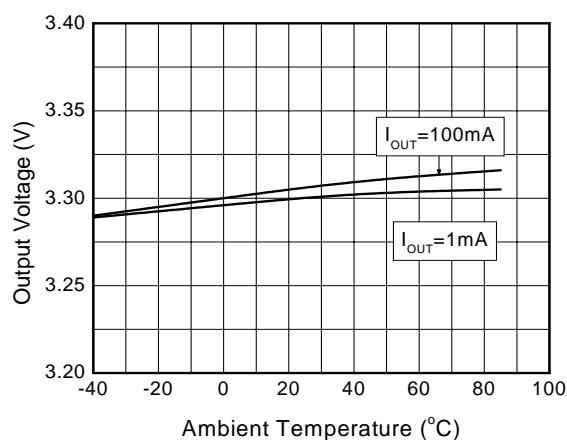


Figure 7. Output Voltage vs. Ambient Temperature

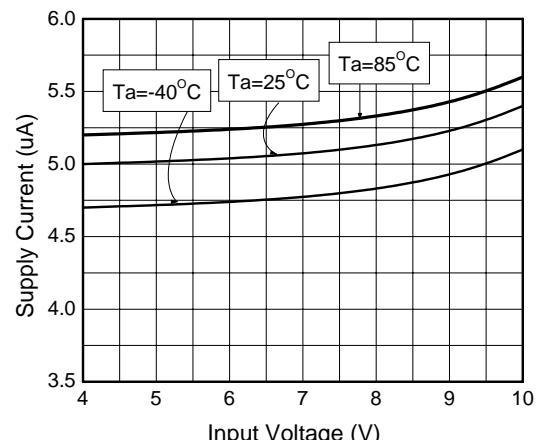


Figure 8. Supply Current vs. Ambient Temperature

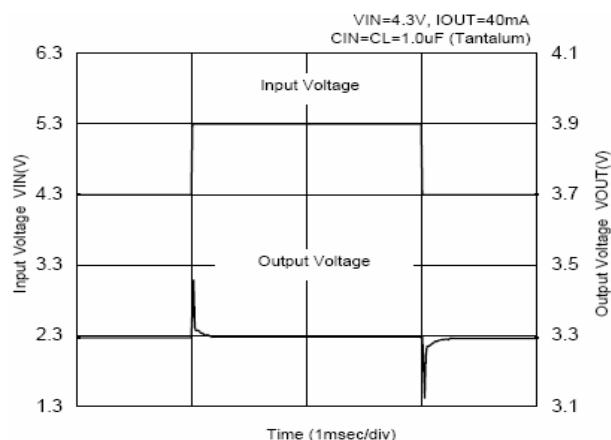


Figure 9. Input Transient Response

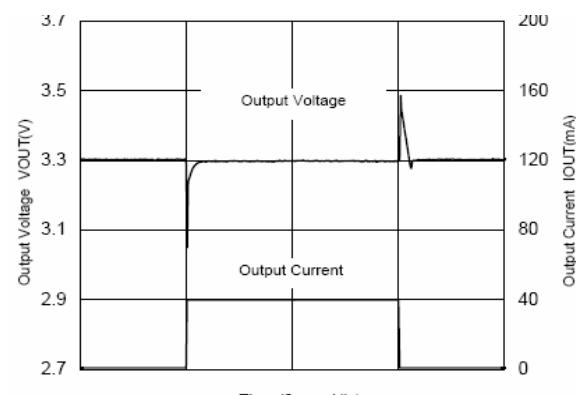


Figure 10. Load Transient Response

**DISCLAIMER**

INNOVA SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. INNOVA DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.